

Razor Wire Specifications

Manufactured at:
COCHRANE STEEL, South Africa

Available at:

Anchor Fence Wholesalers of Miami
3670 NW 79th Street • Miami, FL 33147
Phone: 305-691-7711 • Fax: 305-693-1386
E-Mail: sales@AnchorMiami.com
Web Site: www.AnchorMiami.com


Razor Wire (also known as *barbed tape*) is the modern version of barbed wire, designed to prevent intrusion along perimeter barriers. **Razor Wire** is fabricated from high tensile wire (virtually impossible to cut with standard tools) onto which a multitude of razor-sharp barbs are formed at close intervals. The barbs are designed to have a piercing and gripping action. The wire and strip are galvanized to prevent corrosion.

STANDARD BLADES

Galvanized Steel
0.45 - 0.5 mm (0.02")


STANDARD CORE WIRE

Galvanized Steel Wire
HIGH TENSILE : 1400/1500 MPA
DIA: 2.4 - 2.5 mm (0.098")

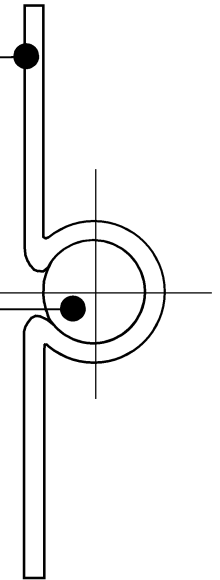


Cross Section

Stainless and other corrosion-resistant materials available on request

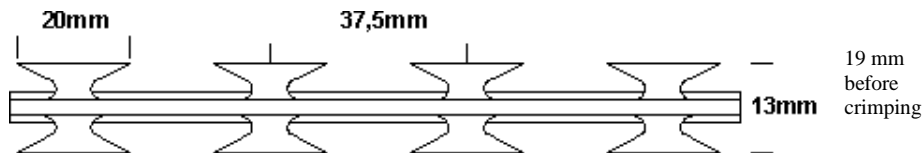


1) Medium Blade Profile


Standard Blade Profile, suits the most of the typical applications from domestic fencing to riot barriers.

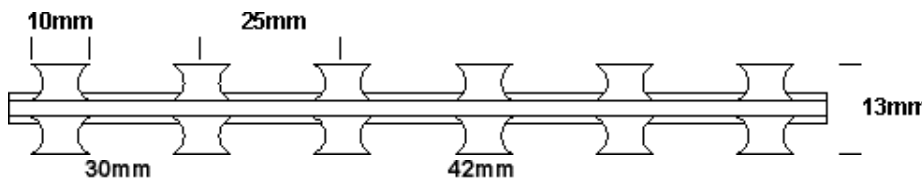

2) Short Blade Profile

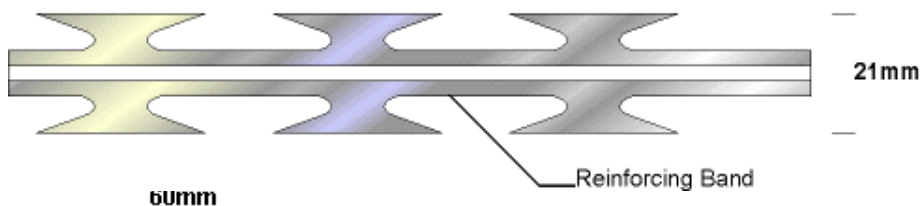

3) Ripper Profile

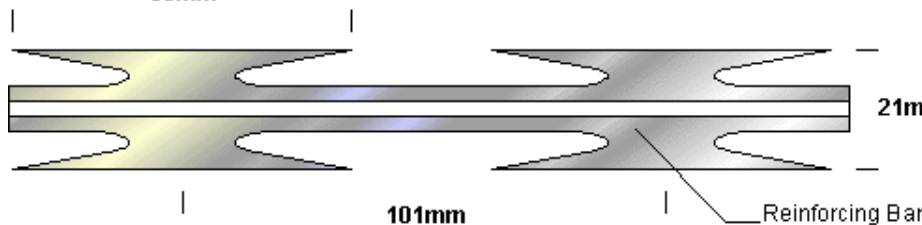

4) Long Blade Profile

MATERIAL SPECIFICATIONS

Wire	2.5 mm High Tensile Galvanised 2.5 mm High Tensile Stainless Steel
Blade / Strip	0.5 mm Galvanised 0.5 mm Stainless Steel
Clips	2.0 mm Galvanised 1.6 mm Stainless Steel

Anchor Fence Wholesalers

Note: Specifications may change without notice. All dimensions are approximate, manufacturers tolerances apply.